


TECHNICAL SPECIFICATIONS MKF 150



- ✓ Multi layer insulation
- ✓ Kanthal A1 heating elements
- ✓ Heating elements in easily replaced special supports (Bonis Patented)
- ✓ Controller with 32 programs
- ✓ Three zone temperature control
- ✓ Type S thermocouple
- ✓ Heating from five sides
- ✓ Door safety switch
- ✓ Observation holes
- ✓ Door opening selection (left / right)
- ✓ 3 year Warranty
- ✓ Technical Support Department

Capacity:	148 lit
Internal Dimensions	Width: 45 cm
	Length: 55 cm
	Height: 60 cm
External Dimensions	Width: 112 cm
	Length Open door: 186 cm
	Length Close door: 128 cm
	Height: 155 cm

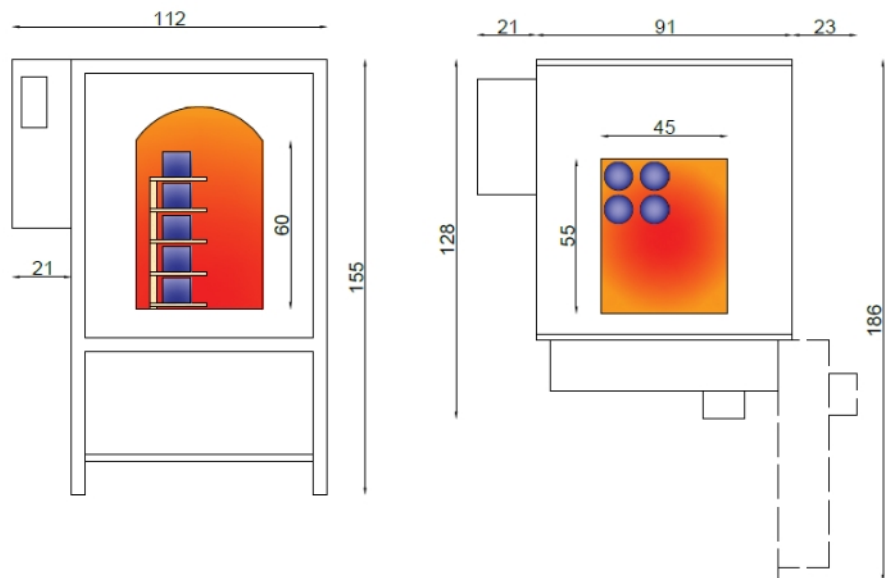

Maximum operating temperature:

- 1200C / 2192F / Cone 5: Model MKF150L
- 1250C / 2282F / Cone 7: Model MKF150M
- 1300C / 2372F / Cone 10: Model MKF150H

Please note:

All materials used for kiln construction are suitable for temperatures up to 1350C. Maximum operating temperature is set according to kiln installed power, and temperature control sensor (thermocouple)

ENERGY



Model	Power	Supply	Fixed Connection		Plug
			Cable	Fuse	
MKF150L	9 kW	3 phases	5X4	20	220 3P+N+E 25A
MKF150M & H	13 kW	3 phases	5X4	20	220 3P+N+E 25A