

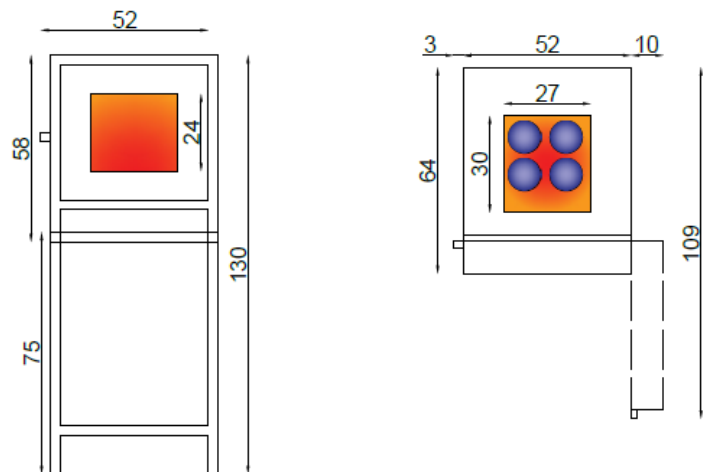
TECHNICAL SPECIFICATIONS MKF 20


- ✓ Multi layer insulation
- ✓ Kanthal A1 heating elements
- ✓ Heating elements in grooved firebricks
- ✓ Controller with 32 programs
- ✓ Type S thermocouple
- ✓ Heating from three sides
- ✓ Door safety switch
- ✓ Steel base included
- ✓ Observation holes
- ✓ Door opening selection (left / right)
- ✓ 3 year Warranty
- ✓ Technical Support Department

Capacity:	19 lit
-----------	--------

Internal Dimensions	Width:	27 cm
	Length:	30 cm
	Height:	24 cm

External Dimensions	Width:	52 cm
	Length Open door:	109 cm
	Length Close door:	64 cm
	Height:	130 cm


Maximum operating temperature:

- 1200C / 2192F / Cone 5: Model MKF20L
- 1250C / 2282F / Cone 7: Model MKF20M
- 1300C / 2372F / Cone 10: Model MKF20H

Please note:

All materials used for kiln construction are suitable for temperatures up to 1350C. Maximum operating temperature is set according to kiln installed power, and temperature control sensor (thermocouple)

ENERGY


Model	Power	Connection	Cable	Fuse	Plug
MKF20L	2.5 kW	1 phase	3X2.5	16	Standard plug
MKF20M & H	3 kW	1 phase	3X2.5	16	Standard plug