


TECHNICAL SPECIFICATIONS MKF 230



*Kiln shown in picture is type MKF320

- ✓ Multi layer insulation
- ✓ Kanthal A1 heating elements
- ✓ Heating elements in easily replaced special supports (Bonis Patented)
- ✓ Controller with 32 programs
- ✓ Three zone temperature control
- ✓ Type S thermocouple
- ✓ Heating from five sides
- ✓ Door safety switch
- ✓ Observation holes
- ✓ Door opening selection (left / right)
- ✓ 3 year Warranty
- ✓ Technical Support Department

Capacity:		223 lit
Internal Dimensions	Width:	48 cm
	Length:	62 cm
	Height:	75 cm
External Dimensions	Width:	116 cm
	Length Open door:	196 cm
	Length Close door:	134 cm
	Height:	163 cm

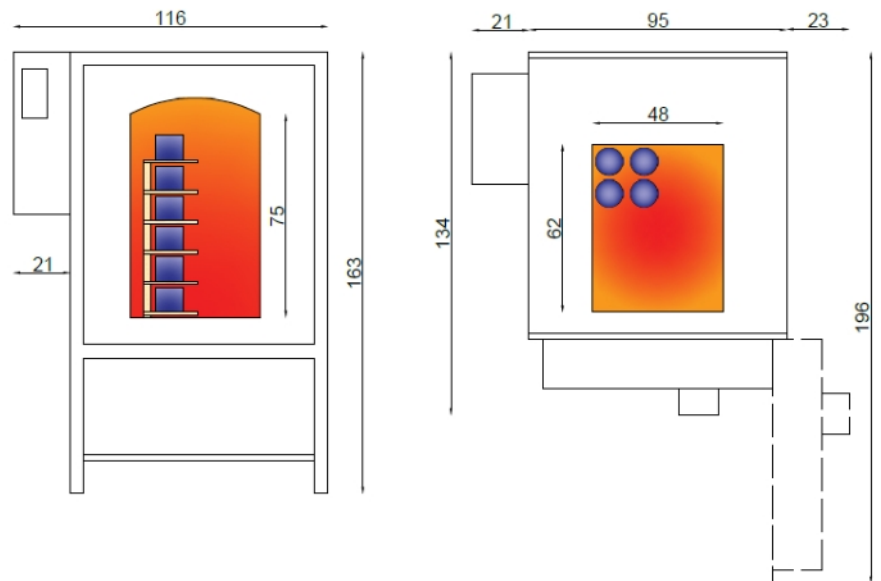

Maximum operating temperature:

- 1200C / 2192F / Cone 5: Model MKF230L
- 1250C / 2282F / Cone 7: Model MKF230M
- 1300C / 2372F / Cone 10: Model MKF230H

Please note:

All materials used for kiln construction are suitable for temperatures up to 1350C. Maximum operating temperature is set according to kiln installed power, and temperature control sensor (thermocouple)

ENERGY



Model	Power	Supply	Fixed Connection		Plug
			Cable	Fuse	
MKF230L	15 kW	3 phases	5X6	25	220 3P+N+E 25A
MKF230M & H	18 kW	3 phases	5X10	35	220 3P+N+E 35A