

**TECHNICAL SPECIFICATIONS MKF 40**




- ✓ Multi layer insulation
- ✓ Kanthal A1 heating elements
- ✓ Heating elements in grooved firebricks
- ✓ Controller with 32 programs
- ✓ Type S thermocouple
- ✓ Heating from three sides
- ✓ Door safety switch
- ✓ Steel base included
- ✓ Observation holes
- ✓ Door opening selection (left / right)
- ✓ 3 year Warranty
- ✓ Technical Support Department

Capacity:	43 lit
-----------	--------

Internal Dimensions	Width:	35 cm
	Length:	35 cm
	Height:	35 cm

External Dimensions	Width:	64 cm
	Length Open door:	132 cm
	Length Close door:	75 cm
	Height:	142 cm

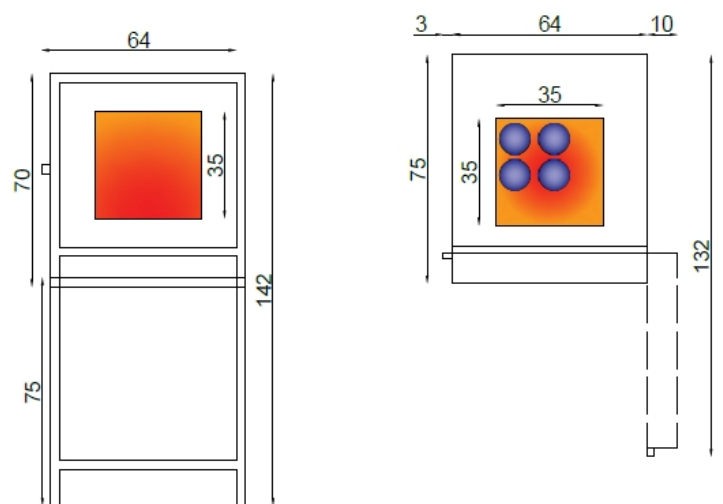

**Maximum operating temperature:**

- 1200C / 2192F / Cone 5: Model MKF40L
- 1250C / 2282F / Cone 7: Model MKF40M
- 1300C / 2372F / Cone 10: Model MKF40H

Please note:

All materials used for kiln construction are suitable for temperatures up to 1350C. Maximum operating temperature is set according to kiln installed power, and temperature control sensor (thermocouple)

**ENERGY**



Model	Power	Connection	Cable	Fuse	Plug
MKF40L	4 kW	1 phase	3X6	25	220 3P+N+E 25A
		3 phases	5X1.5	10	220 3P+N+E 16A
MKF40M & H	4,5 kW	1 phase	3X6	25	220 3P+N+E 25A
		3 phases	5X1.5	10	220 3P+N+E 16A