


**TECHNICAL SPECIFICATIONS MKF 900**



\*Kiln shown in picture is type MKF600

- ✓ Multi layer insulation
- ✓ Kanthal A1 heating elements
- ✓ Heating elements in easily replaced special supports (Bonis Patented)
- ✓ Controller with 32 programs
- ✓ Three zone temperature control
- ✓ Type S thermocouple
- ✓ Heating from five sides
- ✓ Door safety switch
- ✓ Observation holes
- ✓ Door opening selection (left / right)
- ✓ 3 year Warranty
- ✓ Technical Support Department

Capacity:		912 lit
Internal Dimensions	Width:	80 cm
	Length:	95 cm
	Height:	120 cm
External Dimensions	Width:	153 cm
	Length Open door:	241 cm
	Length Close door:	149 cm
	Height:	180 cm

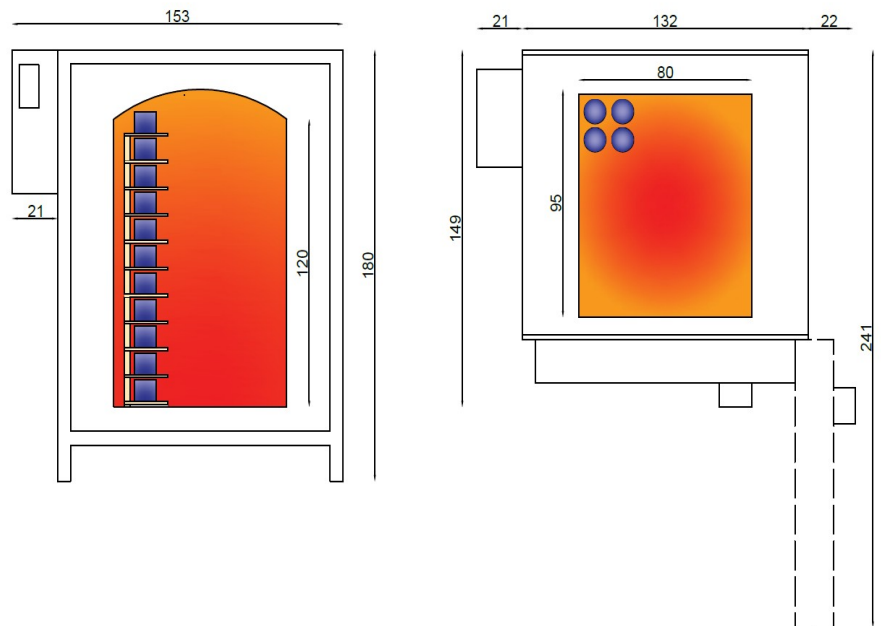

**Maximum operating temperature:**  
 1200C / 2192F / Cone 5: Model MKF900L  
 1250C / 2282F / Cone 7: Model MKF900M  
 1300C / 2372F / Cone 10: Model MKF900H

Please note:  
 All materials used for kiln construction are suitable for temperatures up to 1350C. Maximum operating temperature is set according to kiln installed power, and temperature control sensor (thermocouple)

**ENERGY**



Model	Power	Supply	Fixed Connection Cable	Fuse	Plug
MKF900L	40 kW	3 phases	5X16	63	220 3P+N+E 63A
MKF900M & H	45 kW	3 phases	5X25	80	220 3P+N+E 80A